



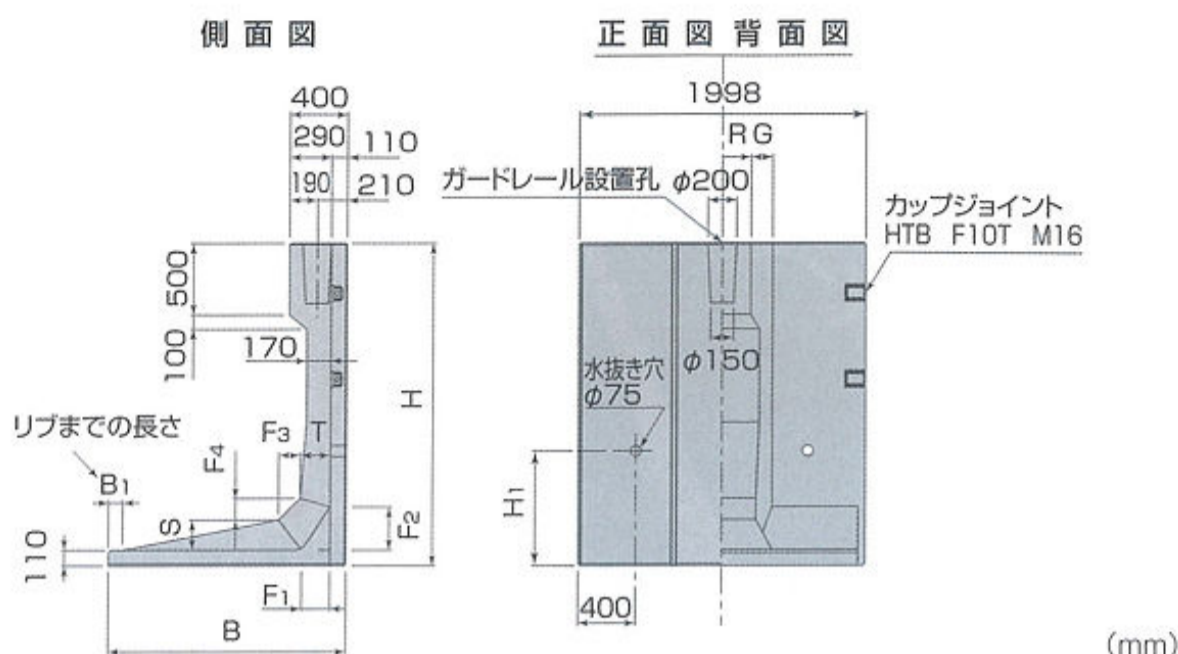

## 形状・寸法

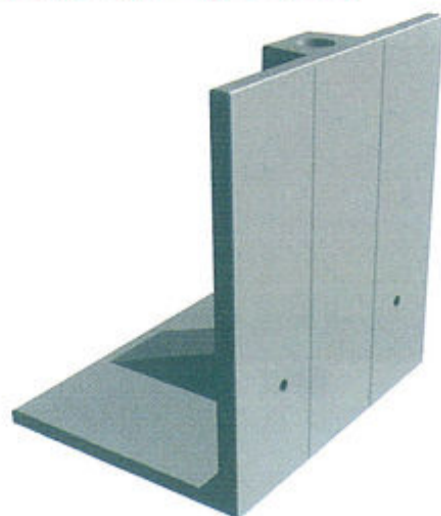

(mm)


サイズ H	寸法													参考質量 (kg)		必要地耐力 (kN/m <sup>2</sup> )				価格
	B		B <sub>1</sub>		T	S	F <sub>1</sub>	F <sub>2</sub>	F <sub>3</sub>	F <sub>4</sub>	R	G	H <sub>1</sub>	LP-1,2	Lp-3	常時		衝突時		
	LP-1,2	LP-3	LP-1,2	LP-3												LP-1,2	LP-1,2	LP-3	LP-3	
1,000	1,150	1,350	100	300	290	170	150	150	50	50	400	50	650	1,400	1,500	39	60	37	48	
1,100	1,150	1,350	100	300	290	170	150	150	50	50	400	50	650	1,480	1,580	44	68	42	54	
1,200	1,150	1,400	100	350	290	170	150	150	50	50	400	50	650	1,560	1,690	49	77	46	57	
1,300	1,200	1,450	150	400	290	170	150	150	50	50	400	50	650	1,670	1,800	53	79	49	60	
1,400	1,200	1,500	150	450	290	170	150	150	50	50	400	50	650	1,750	1,900	59	89	53	63	
1,500	1,250	1,550	150	450	170	170	150	150	50	50	400	50	650	1,780	1,930	63	90	57	67	
1,600	1,300	1,650	200	550	170	170	150	150	50	50	400	50	650	1,870	2,050	67	92	60	67	
1,700	1,350	1,700	250	600	170	170	150	150	50	50	400	50	650	1,970	2,140	72	95	63	71	
1,800	1,400	1,750	300	650	170	170	150	150	50	50	400	50	650	2,060	2,240	76	98	68	75	
1,900	1,450	1,800	350	700	170	170	150	150	50	50	400	50	650	2,160	2,330	81	101	72	78	
2,000	1,500	1,850	400	750	170	170	150	150	50	50	400	50	650	2,250	2,430	85	104	76	82	
2,250	1,650	2,000	100	450	210	210	200	300	150	150	400	150	800	2,860	3,030	95	110	86	91	
2,500	1,800	2,150	250	600	210	210	200	300	150	150	400	150	800	3,120	3,300	105	117	95	99	
2,750	1,950	2,300	100	450	250	250	200	300	150	150	400	150	800	3,530	3,700	114	124	105	108	
3,000	2,100	2,450	250	600	250	250	200	300	150	150	400	150	800	3,790	3,970	124	132	114	117	
3,250	2,250	2,600	100	450	290	290	200	300	150	150	400	150	800	4,230	4,400	133	140	124	126	
3,500	2,400	2,750	250	600	290	290	200	300	150	150	400	150	800	4,490	4,670	143	148	133	134	
3,750	2,550	2,900	100	450	340	340	200	300	150	150	444	128	800	5,040	5,210	152	157	143	144	
4,000	2,700	3,050	250	600	340	340	200	300	150	150	444	128	800	5,310	5,480	162	165	152	153	

(注) LP-1、LP-2とも共通仕様となります。  
※価格は別途お問い合わせ下さい。


## 曲線対応

標準品において、内曲げRについては右表の曲線に対応が可能です。  
外曲げRについては、R=20mの曲線に対応が可能です。

### 内曲げR

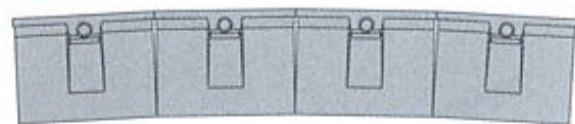

### 外曲げR

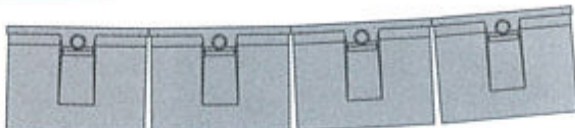

サイズ H	内曲げR (m)	
	LP-1、2	LP-3
1,000	50	55
1,100	50	55
1,200	50	55
1,300	50	60
1,400	50	60
1,500	50	60
1,600	50	70
1,700	55	70
1,800	55	70
1,900	60	75
2,000	60	75
2,250	70	80
2,500	75	85
2,750	80	95
3,000	85	100
3,250	90	105
3,500	95	110
3,750	100	115
4,000	110	125

(注) 上表を超えるR及び折れ点については、お問い合わせ願います。

## 最低連結延長

サイズ H	最低連結延長(m)	
	LP-1、2	LP-3
1,000	10	10
1,100	10	10
1,200	10	10
1,300	10	10
1,400	10	8
1,500	10	8
1,600	8	6
1,700	8	6
1,800	6	6
1,900	6	6
2,000	6	6
2,250	6	4
2,500	6	4
2,750	4	4
3,000	4	4
3,250	4	4
3,500	4	4
3,750	4	4
4,000	4	4

(注) 上表の連結延長を確保して下さい。